




Bending and Shearing

BOSCHERT GIZELIS.co



Contents

- 4 The company
- 6 Why Boschert Gizelis?
- 8-11 **G BEND[®]** *plus* Bending
- 12-15 **G MASTER[®]** Bending
- 16-19 **G HD[®]** Bending
- 20-23 Options – Bending
- 24 Offline Software
- 25 Tooling – Bending
- 26-29 **G CUT[®]** Shearing
- 30-33 Options – Shearing
- 34 Product Range
- 35 After-Sales Service



The company

Gizelis S.A., founded by Stamatis Gizelis in 1968, is specializing in manufacturing sheet-metal machinery. It is currently one of the oldest companies in its field and its activities range from machine designing and development to 'in-house' manufacturing of sheet-metal processing machines.

'Gizelis S.A.' is a well-established manufacturing company, always present in the global market. Today the company, due to its large network of associates worldwide, can offer solutions in sheet-metal processing machinery production chain.

In 2004 'Gizelis S.A.' formed a strategic alliance with 'Boschert GmbH', a company located in Germany. As a result, a new series of machines has emerged aiming to provide the customer with a full range of high-quality sheet-metal processing machines.



Both 'Boschert GmbH' and 'Gizelis S.A.' operate and are located in European Union. In addition, every manufacturing process and operating procedure take place in their privately-owned premises.

The quality of human resources is of great significance for 'Gizelis S.A.' A team of highly qualified engineers and managers, fully experienced in the field of their expertise, is responsible for the company's activities, from research and development to production and marketing. We are strongly committed to continue investing in R&D while aiming to provide high-quality products that are technologically advanced and to design new products the rapidly changing sheet-metal industry demands.

Our mission is to provide a complete range of high-quality sheet-metal processing machines to our customers through constant development and innovation.



Why Boschert Gizelis?

- ▶ Long stroke and daylight as standard even in basic models!
- ▶ Tradition & Reliability. Years of experience on bending and shearing.
- ▶ Step-by-step instructions and support on suitable tooling and machine selection.
- ▶ Direct service line and constant customer support.

Bending by Boschert - Gizelis

Press Brake Series


GBEND[®] High-level press brakes with top-class equipment and components offering the ultimate flexibility in bending process.

GMASTER[®] State-of-the-art press brakes pleasing even the most demanding users.

GHD[®] Heavy-duty machines for massive loads ≥ 330 tons with strong rigid frame for heavy duty applications.




Double upper and lower roller bearing for accurate and fast beam movement

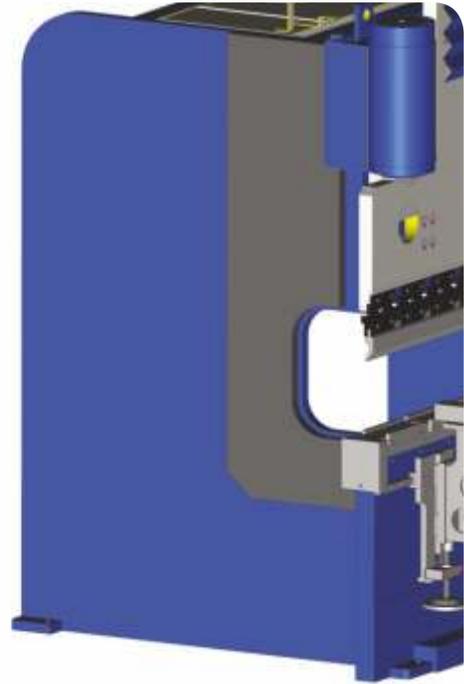

Extra external welded-steel side frame to increase machine's rigidity and minimise deformation.



Back gauge driven through ball screw and double linear guides on every axis.

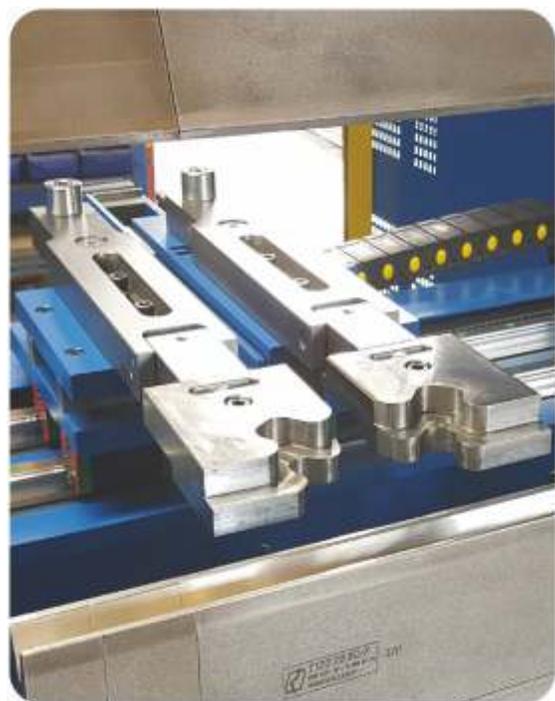

Specially designed finger stops offering high accuracy and maximum flexibility even in conical bends. Maximum stop position 1200mm

GBEND[®] *plus* Series

Standard equipment

- 2D graphic controller, color Touch-Screen, CybTouch8
- Y1, Y2 independent hydraulic cylinders, proportional valve technology
- Extra welded-steel side frames
- Single-axis back gauge system X
- Mechanical upper tool clamping
- Mechanical lower tool clamping
- Efficient, low-noise and accurate hydraulic system
- Beam movement on two double roller bearings on each side
- Strong and stable construction
- Throat: 400mm
- Daylight: 515mm
- Stroke: 250mm
- Safety system using photocells


➤ **Bending length: 3400mm/4400mm**

➤ **Usable space between frames: 3050mm/4050mm**





Back-gauge guiding system on machine's sides (free space at the back)

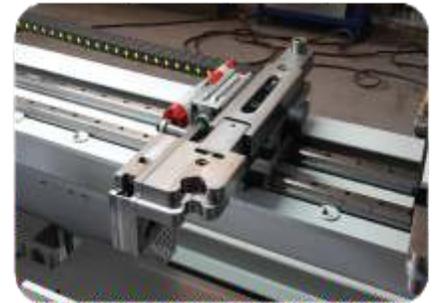

Automatic Thickness Measurement (ATM) and Bending Program Correction (optional)



5-axis back gauge, X-X'-R-Z1-Z2, Delta-X function included (optional)



Moveable heavy-duty front supports on linear guide




Manually measuring the bending angle and Bending Program Correction

		G Bend® 2080	G Bend® 2580	G Bend® 3080	G Bend® 3110	G Bend® 3140	G Bend® 3175	G Bend® 3210	G Bend® 3290
Bending force	[tons]	80	80	80	110	140	175	210	290
Working length	[mm]	2100	2900	3400	3400	3400	3400	3400	3400
Distance between uprights	[mm]	1550	2550	3050	3050	3050	3050	3050	3050
Throat depth	[mm]	400	400	400	400	400	400	400	400
Daylight	[mm]	515	515	515	515	515	515	515	515
Punch stroke	[mm]	250	250	250	250	250	250	250	250
Table width	[mm]	80	80	80	80	80	80 - 220	80 - 220	80 - 220
Fast speed	[mm/sec]	(0 - 180)	(0 - 180)	(0 - 180)	(0 - 180)	(0 - 180)	(0 - 160)	(0 - 160)	(0 - 150)
Working * speed	[mm/sec]	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 15)
Upstroke speed	[mm/sec]	(0 - 160)	(0 - 160)	(0 - 160)	(0 - 160)	(0 - 160)	(0 - 140)	(0 - 130)	(0 - 120)
Hydraulic pressure (max)	[bar]	275	275	275	275	275	275	275	275
Main electric motor	[kW]	11	11	11	15	15	18.5	22	30
Length	[mm] A	3200	3700	4400	4400	4400	4400	4400	4400
Width	[mm] B	1700	1700	1700	1700	1700	1800	1950	1950
Height	[mm] C	2950	2950	2700	2750	2800	2950	3000	3100
Weight (approximate)	[kg]	6500	8000	8500	9500	11000	12500	14500	16200

* Working speed is limited according to safety regulations for CE countries.

		G Bend® 4140	G Bend® 4175	G Bend® 4210	G Bend® 4290	G Bend® 6175	G Bend® 6210	G Bend® 6290
Bending force	[tons]	140	175	210	290	175	210	290
Working length	[mm]	4400	4400	4400	4400	6100	6100	6100
Distance between uprights	[mm]	4050	4050	4050	4050	5050	5050	5050
Throat depth	[mm]	400	400	400	400	400	400	400
Daylight	[mm]	515	515	515	515	515	515	515
Punch stroke	[mm]	250	250	250	250	250	250	250
Table width	[mm]	80	80-220	80-220	220	220	220	220
Fast speed	[mm/sec]	(0 - 180)	(0 - 160)	(0 - 160)	(0 - 150)	(0 - 160)	(0 - 160)	(0 - 160)
Working * speed	[mm/sec]	(0 - 15)	(0 - 15)	(0 - 15)	(0 - 10)	(0 - 10)	(0 - 10)	(0 - 10)
Upstr oke speed	[mm/sec]	(0 - 160)	(0 - 140)	(0 - 130)	(0 - 120)	(0 - 140)	(0 - 130)	(0 - 120)
Hydraulic pressure (max)	[bar]	275	275	275	275	275	275	275
Main electric motor	[kW]	15	18.5	22	30	18.5	22	30
Length	[mm] A	5400	5400	5400	5400	7400	7400	7400
Width	[mm] B	1800	1800	1950	1950	1800	1950	1950
Height	[mm] C	3100	3150	3200	3400	3400**	3600**	3900**
Weight (approximate)	[kg]	13600	15600	17600	22000	23000	24000	28000

* Working speed is limited according to safety regulations for CE countries.
 ** The machine is partially in the ground (special foundation required)

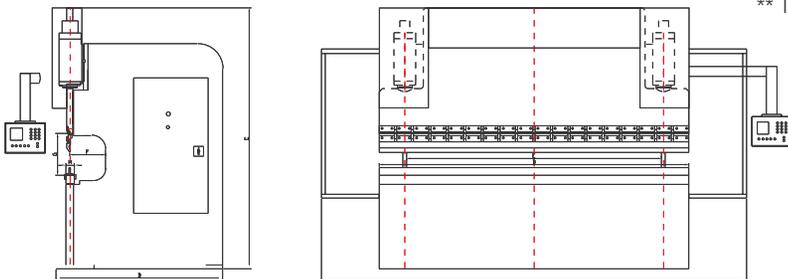

GMASTER[®] Series

Standard equipment

- ↘ Industrial control Cybelec ModEva 15T, 15" Touch Screen, 2D graphical simulation
- ↘ Y1, Y2 independent hydraulic cylinders, proportional valve technology
- ↘ Extra welded-steel side frames
- ↘ Efficient, low-noise and accurate hydraulic system
- ↘ Machine safety system with laser sensors by Fiessler, automatically adjusted depending on upper tool height (CE certified)
- ↘ Beam movement on two double roller bearings on each side
- ↘ 5-axis high-speed back-gauge system, X-X'-R-Z1-Z2
- ↘ Strong and stable construction
- ↘ CNC-controlled anti-deflection system
- ↘ Hydraulic upper-and-lower-tool clamping system made by Wila
- ↘ Wide range of extra equipment
- ↘ Throat: 400mm
- ↘ Daylight: 615mm
- ↘ Stroke: 390mm





Hydraulic upper & lower clamping (Wila premium)



CNC-controlled anti-deflection system (crowning)



5-axis high-speed back-gauge system, X'-R-Z1-Z2




Automatic Thickness Measurement (ATM) and Bending Program Correction (optional)

		G Master [®] 2080	G Master [®] 2580	G Master [®] 3080	G Master [®] 3110	G Master [®] 3140	G Master [®] 3175	G Master [®] 3210	G Master [®] 3290
Bending force	[tons]	80	80	80	110	140	175	210	290
Working length	[mm]	2100	2600	3100	3100	3100	3100	3100	3100
Distance between uprights	[mm]	1550	2050	2550	2550	2550	2550	2550	2550
Throat depth	[mm]	400	400	400	400	400	400	400	400
Daylight	[mm]	615	615	615	615	615	615	615	615
Punch stroke	[mm]	390	390	390	390	390	390	390	390
Table width	[mm]	80	80	80	80	80	80 - 220	80 - 220	80 - 220
Fast speed	[mm/sec]	(0 - 180)	(0 - 180)	(0 - 180)	(0 - 180)	(0 - 180)	(0 - 160)	(0 - 160)	(0 - 150)
Working * speed	[mm/sec]	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 20)	(0 - 15)
Upstroke speed	[mm/sec]	(0 - 160)	(0 - 160)	(0 - 160)	(0 - 160)	(0 - 160)	(0 - 150)	(0 - 140)	(0 - 130)
Hydraulic pressure (max)	[bar]	275	275	275	275	275	275	275	275
Main electric motor	[kW]	11	11	11	15	15	18.5	22	30
Length	[mm] A	3200	3700	4400	4400	4400	4400	4400	4400
Width	[mm] B	1700	1700	1700	1700	1700	1850	1950	1950
Height	[mm] C	3150	3400	3400	3450	3450	3550	3550	3550
Weight (approximate)	[kg]	6700	7200	8700	9700	11200	12700	14700	16200

* Working speed is limited according to safety regulations for CE countries.

		G Master® 4140	G Master® 4175	G Master® 4210	G Master® 4290	G Master® 6175	G Master® 6210	G Master® 6290
Bending force	[tons]	140	175	210	290	175	210	290
Working length	[mm]	4100	4100	4100	4100	6100	6100	6100
Distance between uprights	[mm]	3550	3550	3550	3550	5050	5050	5050
Throat depth	[mm]	400	400	400	400	400	400	400
Daylight	[mm]	615	615	615	615	615	615	615
Punch stroke	[mm]	390	390	390	390	390	390	390
Table width	[mm]	80	80 - 220	80 - 220	220	220	220	220
Fast speed	[mm/sec]	(0 - 180)	(0 - 160)	(0 - 160)	(0 - 150)	(0 - 160)	(0 - 160)	(0 - 160)
Working * speed	[mm/sec]	(0 - 15)	(0 - 15)	(0 - 15)	(0 - 10)	(0 - 10)	(0 - 10)	(0 - 10)
Upstroke speed	[mm/sec]	(0 - 160)	(0 - 140)	(0 - 130)	(0 - 120)	(0 - 140)	(0 - 130)	(0 - 120)
Hydraulic pressure (max)	[bar]	275	275	275	275	275	275	275
Main electric motor	[kW]	15	18.5	22	30	18.5	22	30
Length	[mm] A	5400	5400	5400	5400	7400	7400	7400
Width	[mm] B	1750	1800	1950	1950	1950	1950	1950
Height	[mm] C	3550	3550	3650	3850	3850**	4150**	4350**
Weight (approximate)	[kg]	13200	15200	16200	18200	23200	24200	28200

* Working speed is limited according to safety regulations for CE countries.
The machine is partially in the ground. (special foundation required)

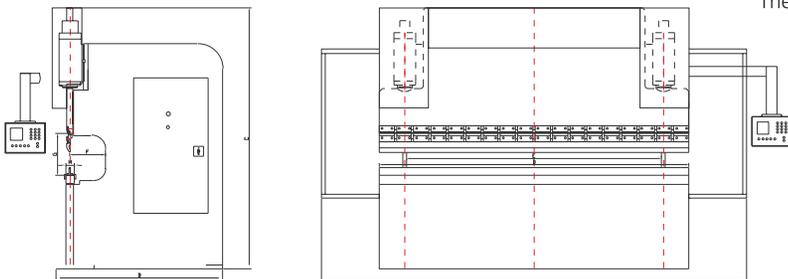

Standard equipment

- 2D graphic controller, color Touch-Screen, CybTouch8
- Y1, Y2 independent hydraulic cylinders, proportional valve technology
- Extra welded-steel side frames
- Strong and stable construction
- Efficient, low-noise and accurate hydraulic system
- Beam movement on two double roller bearings on each side
- Single-axis back gauge system X
- Mechanical upper tool clamping
- Mechanical lower tool clamping
- Stroke & Daylight customised depending on model and customer's request
- Throat: 500mm
- Daylight: 570mm
- Stroke: 320mm
- Safety system using photocells





Beam movement on heavy-duty bronze sliders to secure safety and accuracy



Heavy-duty 2-axis back gauge, X-R




Heavy-duty clamping system up to 350t/m (optional)

		G HD [®] 3330	G HD [®] 4330	G HD [®] 4440	G HD [®] 6330	G HD [®] 6440
Bending force	[tons]	330	330	440	330	440
Working length	[mm]	3100	4100	4100	6100	6100
Distance between uprights	[mm]	2550	3550	3550	5050	5050
Throat depth	[mm]	500	500	500	500	500
Daylight	[mm]	570	570	570	570	570
Punch stroke	[mm]	320	320	320	320	320
Table width	[mm]	250	220	220	220	220
Fast speed	[mm/sec]	(0 - 120)	(0 - 120)	(0 - 100)	(0 - 120)	(0 - 100)
Working speed	[mm/sec]	(0 - 10)	(0 - 8)	(0 - 7)	(0 - 7)	(0 - 7)
Upstroke speed	[mm/sec]	(0 - 100)	(0 - 90)	(0 - 90)	(0 - 90)	(0 - 90)
Hydraulic pressure (max)	[bar]	275	275	275	275	255
Main electric motor	[kW]	30	30	30	22	30
Length	[mm] A	4400	5400	5400	7400	7400
Width	[mm] B	2100	2700	2700	2700	2700
Height	[mm] C	3050*	3400*	3400*	3700*	3750*
Weight (approximate)	[kg]	24000	27000	33000	34000	45000

*The machine is partially in the ground. (special foundation required)

		G HD® 6550	G HD® 6660	G HD® 6880	G HD® 7550	G HD® 7880
Bending force	[tons]	550	660	880	550	880
Working length	[mm]	6100	6100	6100	7100	7100
Distance between uprights	[mm]	5050	5050	5050	6050	6050
Throat depth	[mm]	500	500	500	500	500
Daylight	[mm]	590	590	650	590	650
Punch stroke	[mm]	350	350	380	350	380
Table width	[mm]	220	220	220	220	220
Fast speed	[mm/sec]	(0 - 100)	(0 - 90)	(0 - 90)	(0 - 90)	(0 - 90)
Working speed	[mm/sec]	(0 - 7)	(0 - 7)	(0 - 7)	(0 - 7)	(0 - 7)
Upstroke speed	[mm/sec]	(0 - 90)	(0 - 80)	(0 - 80)	(0 - 80)	(0 - 80)
Hydraulic pressure (max)	[bar]	275	275	275	275	275
Main electric motor	[kW]	37	45	55	37	75
Length	[mm] A	7400	7400	7400	8400	8400
Width	[mm] B	2700	2800	2800	2800	2800
Height	[mm] C	3800*	4100*	4100*	3800*	4100*
Weight (approximate)	[kg]	49000	54000	62000	65000	78000



*The machine is partially in the ground. (special foundation required)

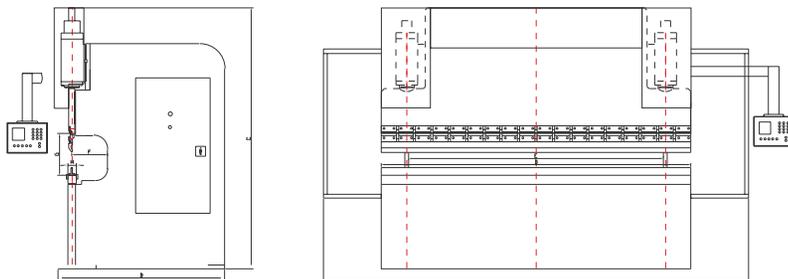

CNC PRESS BRAKES

OPTIONAL EQUIPMENT

		G BEND® <small>Plus</small>	G MASTER®	G HD®
Clamping Systems				
	<p>ROL 1 fast clamping – Vertical/horizontal loading and unloading <i>(tool modification required)</i></p> <p>Double ROL 1/KDS system, tool-reversing capability <i>(tool modification required)</i></p>	✓		✓
	<p>Hydraulic WILA clamping, upper & lower tool – Premium/Pro Version</p>	✓	✓	✓
	<p>Pneumatic upper-tool clamping with vertical/horizontal exchange, ROL100-PN <i>(standard tools/no tool modification required)</i></p>	✓		✓
Anti-deflection Systems				
	<p>Manual anti-deflection system (crowning)</p>	✓		✓
	<p>CNC-controlled anti-deflection system (crowning)</p>	✓	✓	✓
Safety				
	<p>Safety laser Fiessler AKAS-LC, manual adjustment depending on the upper-tool height</p>	✓		✓
	<p>Safety laser Fiessler AKAS-3, automatic adjustment depending on the upper-tool height</p>	✓	✓	✓

		G BEND ^{plus}	G MASTER [®]	G HD [®]
Automation & Measurement				
	Bending Angle Measuring with laser and Bending Program Correction	✓	✓	✓
	Manually Measuring Bending Angle and Bending Program Correction	✓	✓	✓
	Automatic Thickness Measurement (ATM) and Bending Program Correction	✓	✓	✓
Offline Software				
	CAD/CAM Bending Software with auto tool selection and bend sequence selection (compatible with all Cybelec's controllers)	✓	✓	✓
Industrial Controls				
	CybTouch 12, 12" Touch Screen, 2D graphical controller	✓		✓
	Cybelec Modeva Pac, 15" Touch Screen, 2D graphical controller	✓		✓
	Modeva RA, 15" Touch Screen, 3D graphical controller	✓	✓	✓

CNC PRESS BRAKES

OPTIONAL EQUIPMENT

		G BEND _{flex}	G MASTER®	G HD®
		Back Gauges		
	Single-axis back gauge, X	✓		✓
	2-axis back gauge, X-R	✓		✓
	3-axis back gauge, X1-X2-R	✓		✓
	4-axis back gauge, X-R-Z1-Z2	✓		✓
	5-axis back gauge, X-X'-R-Z1-Z2	✓	✓	✓
	5-axis back gauge, X1-X2-R-Z1-Z2	✓	✓	✓
	6-axis back gauge, X1-X2-R1-R2-Z1-Z2	✓	✓	✓

		G BEND _{plus}	G MASTER®	G HD®
Front Supports & Bending Aids				
	Heavy-duty front supports, moveable on linear guides (height adjustable) (2 pieces)	✓	✓	✓
	CNC Front supports (bending aid)	✓	✓	✓
	Parking position for front supports	✓	✓	✓
Extra				
	Air-condition system for installation in countries with extreme weather conditions	✓	✓	✓
	Robotic applications	✓	✓	✓
	Simultaneous operation of two or more machines.	✓	✓	✓

Offline programming

FROM THE IDEA... TO REALITY



THE PROBLEM

What you design is not what you produce!

WHY?

Because, the unfolding and cutting process do not take into consideration every bending parameter might occur (e.g. available tools, tools radius etc.).

THE SOLUTION

BG-Soft combines the BG-Soft Cut with BG-Soft Bend into one unified environment. This way every aspect of the manufacturing process (bending and cutting) is considered, thus.

WHAT YOU DESIGN IS WHAT YOU GET !!!

FEATURES

- Direct part transfer from SolidWorks, Solid Edge and Inventor
- Importing and unfolding of IGES and STEP 3D parts
- Automatic and manual tool selection based on material, machine and tool properties
- Automatic and manual bending sequence with collision detection
- Automatic and manual fingerstop positioning with graphic control of every axis
- Automatic retraction calculation
- 3D simulation of the bending process with collision detection
- Native NC generation enables direct loading of programs to the machine control
- Comprehensive Setup Reports for the machine operator including bending sequence, tooling and bend-by-bend graphics.

ADVANTAGES

BG-Soft Bend enhances your productivity because:






- Faster design-to-production time with automated features
- Offline programming means minimum machine down-time
- Collision-free bending sequences mean reduced stock wastage
- BG-Soft Bend's tool library is compatible with the tooling available resulting in ready-to-be-produced Setup Reports


3D Simulation and Collision Detection
Efficient Tool Selection
Bending Sequence Selection
Fingerstops Positioning

SETUP REPORTS

Comprehensive Setup Reports include:

- Bending sequence instructions
- Tool setup details
- Product handling
- Bend-by-bend graphics

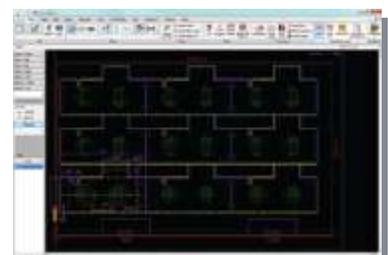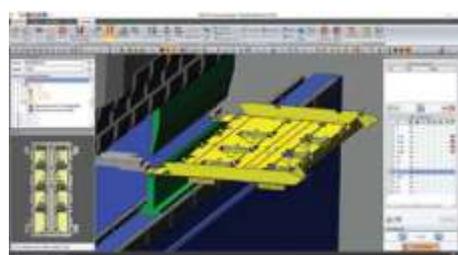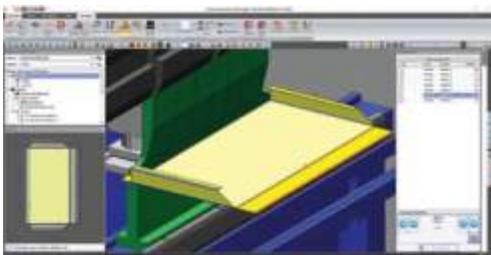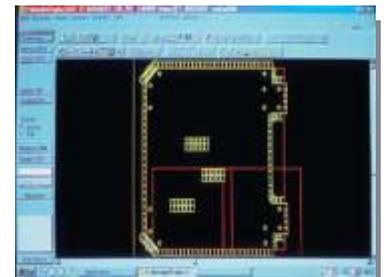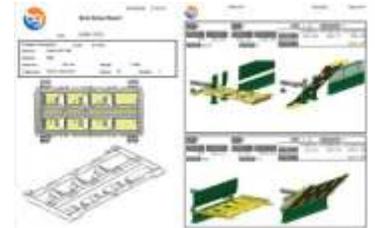

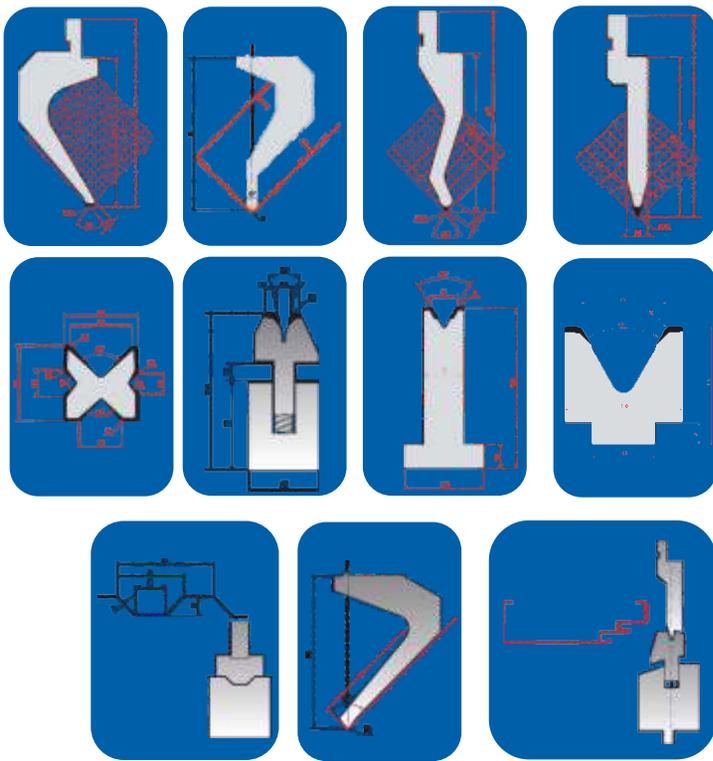

Tooling Standard or Special


We deliver the machine and tools ready to be used

↘ Complete range of standard and special tools for any application


↘ Collaboration with top-class European tool manufacturers

↘ Constant customer support on tool/machine set-up

42 kg/mm ²																				
S mm	4	5	6	8	10	12	16	20	25	32	40	50	63	80	100	125	160	200	250	V
	3	3.5	4	5.5	6.5	8	10.5	13	16.5	21	26	32.5	41	52	65	81.5	104	130	163	B
	0.5	0.7	0.8	1	1.3	1.5	2	2.5	3.2	4.4	5	6.5	8	10	12	15	20	25	37	Ri
0.6	6	5	3	2																
0.8	12	9	7	5	4															
1		15	11	8	6	5														
1.2			18	12	9	7	5													
1.5				21	15	12	8	6												
2					30	23	16	12	9											
2.5						39	27	20	14	11										
3							43	31	23	16	12									
4								60	44	32	23	18								
5									76	54	39	29	22							
6										85	62	45	33	25						
8											121	88	70	46	35					
10												151	109	79	58	44				
12													173	124	91	66	50			
15														213	155	113	81	62		
20															302	220	158	115	89	
25																378	269	197	144	Ft/m



70 kg/mm ²																				
S mm	4	5	6	8	10	12	16	20	25	32	40	50	63	80	100	125	160	200	250	V
	3	3.5	4	5.5	6.5	8	10.5	13	16.5	21	26	32.5	41	52	65	81.5	104	130	163	B
	0.5	0.7	0.8	1	1.3	1.5	2	2.5	3.2	4.4	5	6.5	8	10	12	15	20	25	37	Ri
0.6	10	8	6	4																
0.8	20	15	12	8	6															
1		25	19	13	10	8														
1.2			30	21	15	12	8													
1.5				35	26	20	13	10												
2					50	38	26	19	15											
2.5						66	45	33	24	18										
3							71	52	38	27	21									
4								101	73	53	38	30								
5									126	90	66	48	37							
6										142	103	76	55	42						
8											202	147	117	77	59					
10												252	182	131	96	74				
12													288	207	151	110	83			
15														354	258	189	135	104		
20															504	367	263	192	148	
25																603	448	328	240	Ft/m



G_{CUT}[®] CNC Series

Standard equipment

- Swing beam hydraulic shear
- Heavy-duty, all-welded-steel rigid frame
- Hold-down pressure adjustment depending on cutting pressure
- Colour Touch Screen 10,4"
- Programmed cutting length
- Close hold-downs near the squaring arm for better small-part holding & cutting
- High-speed CNC back gauge with AC servomotor
- Precision lighting on the cutting line
- Specially-made cutting blades suitable for both steel and stainless steel
- Ball casters on the table
- Finger-protection safety fence (accessible)
- Safety system on the back including side doors and photocells
- Front-sheet supports 1m each with linear scale
- 1x squaring arm 1m with linear scale
- Electric parts by Siemens, Telemecanique
- Hydraulic parts by BOSCH-REXROTH






Movable Front Supports (optional)



Specially-designed rectangular hold downs, suitable for cutting narrow stripes (optional)



Colour Touch Screen 10.4", movable along machine's length (optional)

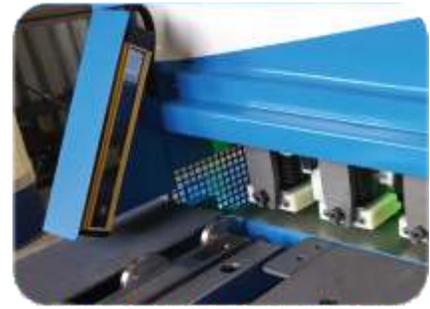


Finger protection with light guards (optional)

		G Cut [®] CNC 2504	G Cut [®] CNC 3006	G Cut [®] CNC 3010	G Cut [®] CNC 3013	G Cut [®] CNC 3016	G Cut [®] CNC 3020	G Cut [®] CNC 4006
Maximum cutting thickness mild steel st42	[mm]	4	6	10	13	16	20	6
Maximum cutting thickness stainless steel	[mm]	2	4	6	8	10	12	4
Maximum cutting length	[mm]	2600	3100	3100	3100	3100	3100	4100
Throat depth	[mm]	155	180	210	210	260	260	180
Back gauge stroke	[mm]	1000	1000	1000	1000	1000	1000	1000
Cutting angle	[degrees]	1.26	1.42	1.79	1.97	2.33	2.85	1.49
Maximum hydraulic pressure	[bar]	255	255	255	255	255	255	255
Main Motor Power	[kW]	7.5	11	15	22	30	37	11
Length	[mm]	3450	3950	3950	3950	3950	3950	4950
Width	[mm]	3500	3900	4100	4500	4500	4500	3900
Height	[mm]	1950	1950	2050	2200	2550	2550	2050
Weight	[kg]	5900	8300	10500	13000	17000	24000	11800

		G Cut® CNC 4010	G Cut® CNC 4013	G Cut® CNC 4016	G Cut® CNC 4020	G Cut® CNC 6006	G Cut® CNC 6010	G Cut® CNC 6013
Maximum cutting thickness mild steel st42	[mm]	10	13	16	20	6	10	13
Maximum cutting thickness stainless steel	[mm]	6	8	10	12	4	6	8
Maximum cutting length	[mm]	4100	4100	4100	4100	6100	6100	6100
Throat depth	[mm]	220	220	220	220	305	305	305
Back gauge stroke	[mm]	1000	1000	1000	1000	1000	1000	1000
Cutting angle	[degrees]	1.91	2.05	2.18	2.20	1.46	1.5	1.5
Maximum hydraulic pressure	[bar]	255	255	255	255	255	255	255
Main Motor Power	[kW]	15	30	30	37	15	22	30
Length	[mm]	4950	4950	4950	5200	6950	6950	6950
Width	[mm]	4100	4500	4800	4800	4100	4500	4500
Height	[mm]	2000	2250	2550	2700	2000	2400*	2400*
Weight	[kg]	15000	16800	24000	28000	22000	28000	36000

*The machine is partially in the ground. (special foundation required)

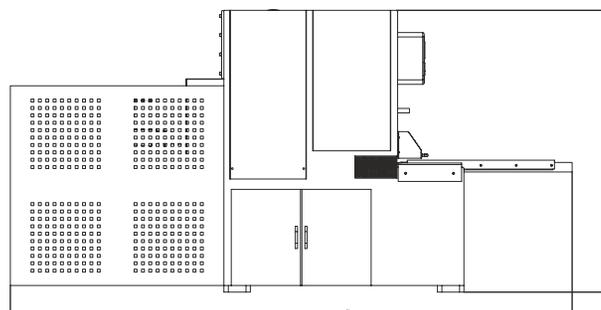

G_{CUT}[®] CNC Series

OPTIONAL EQUIPMENT

RSS System: Rear Sheet Support (optional)

➤ The RSS System is essential for cutting thin sheet-metals and wide strips because while the sheet-metal is put in the shear, due to its weight, it bends and it stops at the wrong position on the back gauge. Thus, it is mis-measured and wrongly as well as badly cut. Applying RSS System, the sheet-metal is properly supported at the back, so it:

- does not bend
- is properly positioned on the back gauge so accurately measured and rightly cut



Position 1: Thanks to the RSS System, the sheet-metal is supported on the back gauge and does not bend.



Position 2: The RSS moves downward about 150mm, stops and takes the entire sheet-metal to be cut so that the cut stripe does not bend due to its weight and touch the floor.



Position 3: The RSS moves even further while inclining so that the sheet-metal moves out of the machine.

RTF System: Return to the front

➤ If someone would like to cut a sheet-metal the 'traditional' way, the cut (clean) piece of sheet-metal would come out at the back of the shear and fall on the floor. This way, the sheet-metal may hit other – already cut – sheet-metals or fall on the floor. Consequently, marks or scratches may be caused on the piece; no one wants this to happen, especially when it comes to manufactures of materials such as stainless steel or steel. In both cases, any mark on the surface of the piece must be avoided. While applying RTF System, the cut piece does not fall down at the back of the shear. On the contrary, it returns directly to the hands of the operator at the front!

This means:

- No mark on the surface
- No scratches
- Time-saving since the operator doesn't have to leave his place to collect the piece at the back of the machine.

**Sheet-Support-System installation required*

NSC System: Narrow Strip Cutting

➤ The application of the innovative NSC System offers the operator the capability to cut narrow strips without being deformed.

The operator programs how many strips are needed, e.g. 4 stripes, 30mm wide each, and the system will automatically cut them, return them to the operator at the front flat with no deformation whatsoever.

**Sheet-Support-System installation required*




MPF System: Movable Front Panel

➤ A unique feature of the shears produced by Gizelis is that the front panel is movable along the machine. Thus, the operator works while having the panel in front of him even if he cuts a sheet-metal at the other end.



ATM System: Automatic Thickness Measurement

➤ While setting the gap between the blades (clearance), the operator may mistype or set the wrong material thickness. In order to avoid this, the machine is equipped with a special sensor which automatically measures the material's thickness. The right figures appear on the panel and the clearance is set automatically.

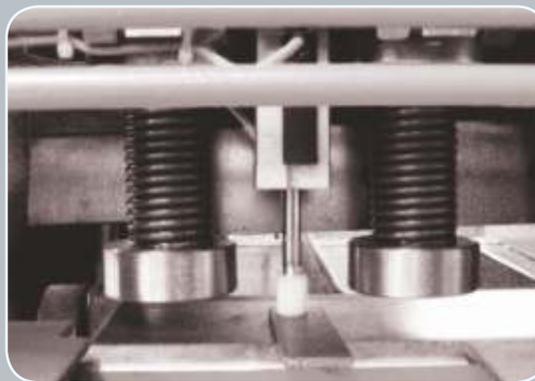

MFS System: Movable Front Supports

➤ The two front supports can be moved manually, yet separately, along the machine so that the operator adjusts them according to the length of the metal piece.



Gcut[®] CNC Series

OPTIONAL EQUIPMENT

Brushes on table
and supports



Chute for small pieces



Extended Front
Supports



Front Protection
with Light Guards



Adjustable Goniometer
for angle cutting



Transport Belts



2-axis Back Gauge,
X1-X2, for angle
cutting



Product Range

➤ Boschert-Gizelis' combined product range covers a large variety of machines, necessary for the sheet-metal processing industry, such as press brakes, shears, punching and notching machines, combined machines, portal type oxy and plasma cutting as well as laser-cutting machines. On top of these, Boschert-Gizelis Group can manufacture specially-made machines upon request.



After-Sale Services

- Teleservice 5 days a week.
- Service stations covering major geographical areas:
 - Germany
 - Greece
 - France
 - Poland
 - Croatia (Balkan countries)
 - Russia
 - India
 - Thailand
 - USA
 - GCC countries
(Bahrain, Kuwait, Oman, Qatar, Saudi Arabia, UAE)

One Group
One Deal
One service center
One Partner



BOSCHERT GIZELIS.co

BOSCHERT GIZELIS. Co | Schimatari Viotias, 32009, Kormatzini Area T: +30 22620 58675, F: +30 22620 57185,
www.gizelis.com, info@gizelis.gr

BOSCHERT GmbH & Co. KG | Mattenstr. 1, 79541 Loerrach, Postfach 7042, Deutschland, T: +49 7621 9593-0, F: +49 7621 55184,
www.boschert.de, info@boschert.de

