



Type
R



**3 ROLLS
SYMMETRICAL ROLL BENDING MACHINE**

Capacity : 0,5-15 mm – Length : 1-4 m



Avantages

- ✓ 100% Hydraulic
- ✓ 3 Rolls driven
- ✓ Double pitch plate bending machine
- ✓ No lamination
- ✓ Wide opening between the rolls
- ✓ Perfect prebended edges
- ✓ Easy cone rolling
- ✓ No pit
- ✓ Calibration of parts



STANDARD EQUIPMENTS

Roundbled
Is a brand developed by Picot to offer a range of economical machines without giving up to quality

- ✓ 3 rolls driven by independent hydraulic motors
- ✓ Digital displays for controlling the position of prebending rolls
- ✓ Automatic and hydraulic synchronization of roll's parallelism
- ✓ Polished rolls
- ✓ Progressive regulation on all movements
- ✓ Tilting device for prebending rolls
- ✓ Cone device (thrust) for conical bending for machines with rolls Ø 120 & 160 mm

OPTIONS


- ✓ Hardened rolls
- ✓ Manual centralized lubrication
- ✓ Cone device (thrust) for conical bending for machines with rolls Ø 200 & 230 mm

3 Rolls	Bending Length	Top Roll Diameter	* Maximum Thickness (mm)				Motor Power
			1,3 x D		10 x D		
	(mm)	(mm)	Bending	Prebending	Bending	Prebending	Kw
R 1003	1 100	90	2,5	2	3	2	2,2
R 1005		120	3,5	3	4,5	4	2,2
R 1010		160	7	5	10	7	4
R 1014		200	11	9	14	11	5,5
R 1016		230	13	11	16	14	7,5
R 1502	1 600	90	2	1,5	2,5	1,5	2,2
R 1504		120	2,5	2	3,5	3	2,2
R 1509		160	6	4,5	9	6	4
R 1512		200	10	8	12	9	5,5
R 1514		230	12	10	14	12	7,5
R 2003	2 100	120	2	1,5	3	2,5	2,2
R 2007		160	5	4	7	5	4
R 2010		200	8	6	10	8	5,5
R 2012		230	10	8	12	10	7,5
R 2506	2 600	160	4	3	6	4	4
R 2509		200	7	5	9	7	5,5
R 2511		230	9	7	11	9	7,5
R 3004	3 100	160	2	1,5	4	3	4
R 3008		200	6	4	8	6	5,5
R 3010		230	8	6	10	8	7,5

Prices *

Roundled	Prices	Options		
		Hardened Rolls	Central Lubrication	Cone device
	€	€		€
R 1003	15 325	1 905	830	included
R 1005	15 325	1 905	830	included
R 1010	20 840	3 130	830	included
R 1014	30 760	3 375	830	855
R 1016	31 865	3 440	830	855
R 1502	15 990	1 975	830	included
R 1504	15 990	1 975	830	included
R 1509	21 500	3 190	830	included
R 1512	31 425	3 815	830	855
R 1514	32 525	3 845	830	855
R 2003	16 430	2 060	830	included
R 2007	21 940	3 245	830	included
R 2010	31 865	4 345	830	855
R 2012	32 965	4 705	830	855
R 2506	23 595	3 375	830	included
R 2509	34 070	4 460	830	855
R 2511	35 170	4 810	830	855
R 3004	25 250	3 600	830	included
R 3008	35 170	4 670	830	855
R 3010	36 275	4 960	830	855

* Prices are EXW Lentilly France
Warranty 1 year

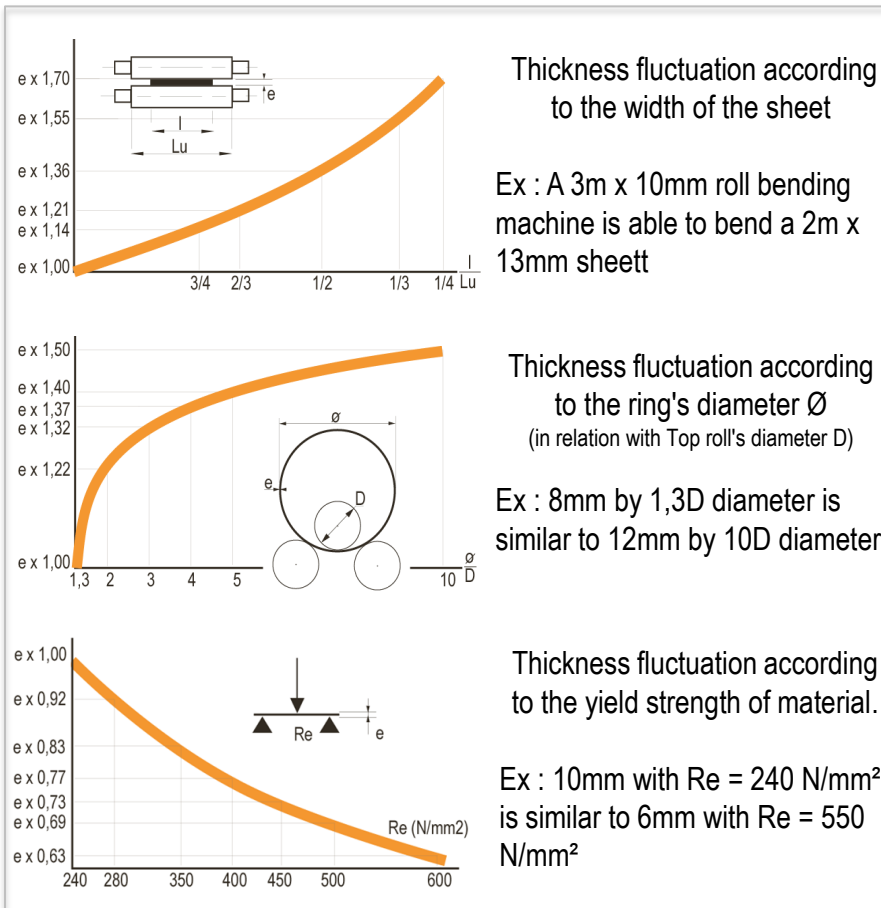

* Technical capacities are given for Steel S 235 (Yield Strength 240 N/mm²)

Your distributor



AMB PICOT

ZA de Charpenay, Allée des Joncs 69210 Lentilly
 Tél. +33 (0)4 74 01 85 05 - Fax. +33 (0)4 74 01 76 56 - E-mail : picot@ambpicot.com

www.ambpicot.fr